



力臻股份有限公司
LJ DEVICE CO., LTD.

零件規格書 / 承認書
SPECIFICATION FOR APPROVAL

CUSTOMER : _____

DESCRIPTION : _____ VIBRATOR

MODEL : _____ :: !6\$, &+@&\$' +6

CUSTOMER PART NO : _____

APPROVED SIGNATURES

--	--	--	--

Rev	Date	Description	Designed	Checked	Approved
A	20&(/1\$/1)	Release		Dc '7\ Yb	

臺北市北投區吉利街 131 號 2 樓

2F, NO. 131, JILI ST., PEITOU, TAIPEI, TAIWAN, R.O.C.

TEL : 886-2-2827-0158 · FAX : 886-2-2827-0348

规格书内容

Contents of Specifications

1. 适用范围/ Applicable Scope	3/12
2. 使用条件/ Operating Conditions	3/12
3. 测试条件/ Test Conditions	3/12
4. 初期电气性能/ Initial Electrical Characteristics	3/12
5. 机械性能/ Mechanical Characteristics	4/12
6. 耐久性能/ Reliability Characteristics	5.6/12
7. 标准测量方法/ Standard Measuring Method	7/12
8. 测量方法及回路图/ Measuring Method & Circuit Map	7/12
9. 使用注意事项/ Cautions in Use	8/12
10. 特性曲线图/ Characteristics Graph	8/12
11. 环境管理物质/ Environmental Management Materials	9/12
12. 外形图/ Mechanical Drawing	10/12
13. 包装/ Packaging	11/12
14. 更改记录/ Revision Records	12/12

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B 料号				
 张勇 24.08.06	 陆国伟 24.08.06	 徐旭 24.08.06	Document No 文件编号: FUGE-2037B Spec.Doc 规格书文档	Edition 版本: A	2/12		

1. 适用范围/ Applicable Scope

本说明书适用于扁平式永磁直流电机FG-B0827LB系列.

This specification applies to Coin Motor DC model FG-B0827LB series.

2. 使用条件/ Operating Conditions

项目/Item		规格/Specification
2-1	额定电压 Rated voltage	3.7V DC
2-2	使用电压范围 Operating voltage	2.7~4.3V DC
2-3	旋转方向 Rotation	CW(clockwise) or CCW(contrary clockwise)
2-4	使用环境 Operating environment	-20~+60°C, 0~95%RH
2-5	保存环境 Storage environment	-30~+70°C, 0~95%RH

3. 测定条件/ Testing Conditions



项目/Item		规格/Specification
3-1	温度 Temperature	25±3°C
3-2	湿度 Humidity	65±20% RH
3-3	气压 Air Pressure	1013±40 hPa
3-4	电源 Power	稳压直流电流 Constant DC Current

4. 初期电气性能/ Initial Electrical Characteristics


项目/Item		规格/Specification	条件/Condition
4-1	额定转速 Rated Speed	8000rpm Min	额定电压下和额定负载下。 At rated voltage and rated load.
4-2	额定电流 Rated Current	90 mA Max	
4-3	起动电流 Starting Current	120 mA Max	在最小起动电压下起动 Motor is rotating at min starting voltage.
4-4	起动电压 Starting Voltage	2.5V DC Max	
4-5	绝缘电阻 Insulation Resistance	10MΩ Min	在100V直流下，导线和机壳间测量 At DC 100V between lead wire and case.
4-6	端子阻抗 Terminal Resistance	55Ω±15% (单相) 100Ω±15% (双相)	在25°C下 At 25°C

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B 料号				
 张工 24.08.06	 薛圆伟 24.08.06	 维旭 24.08.06	Document No 文件编号:FUGE-2037B Spec .Doc 规格书文档			Edition 版本: A	3/12

5. 机械性能/ Mechanical Characteristics

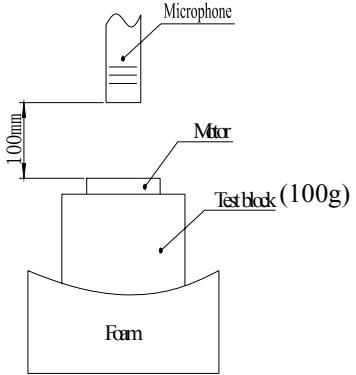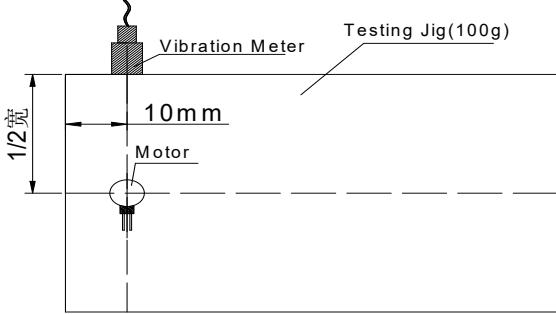项目/Item		规格/Specification
5-1	底盖偏转强度 Bracket deflection strength	9.8N以上 $\geq 9.8N$
5-2	机械噪音 Mechanical noise 在额定电压下。 背景噪音：不大于28dB.A计权 电机轴向水平固定在约100g测试夹具上， 拾音器沿轴向正对电机平面。 测试距离10cm At rated voltage and scene noise as 28dB (A)Max, the shaft is horizontally fastened to the test jig (100g). The Microphone faces the plane of motor along The shaft . The distance is 10cm.	<p style="text-align: center;"></p>
5-3	Vibration Test 振动测定	0.4G Min (PEAK) 


6. 耐久性能/ Reliability Characteristics

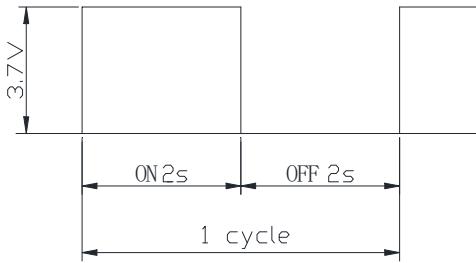项目/Item		规格/Specification	判定标准/Judgment
6-1	寿命 Life	 试验循环 /Test cycle: 50,000 cycles	在常温常湿下放置4h后，电机性能应符合以下要求。 1)额定转速:指标在初始值±30%以内。 2)额定电流:指标在初始值±30%以内。 3)起动电压:2.5V DC Max. After 4h exposure in the ordinary temperature and humidity, change rates of the motor's performance should accord with below requirements: 1)Rated speed: within ±30% of initial value. 2)Rated current: within ±30% of initial value. 3)Starting voltage: 2.5V DC Max

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B 料号				
 24.08.06	 24.08.06	 24.08.06	Document No 文件编号:FGUE-2037B Spec .Doc 规格书文档			Edition 版本: A	4/12


项目/Item		规格/Specification	判定标准/Judgment
6-2	低温放置 Low Temperature Exposure	温度 /Temperature: $-20 \pm 2^{\circ}\text{C}$ 时间 /Time: 96h	
6-3	湿度放置 Humidity Exposure	温度 /Temperature : $+40 \pm 2^{\circ}\text{C}$ 湿度 /Humidity: 90 ~ 95%RH 放置时间 / Exposure time : 96h 无水气凝结 /No condensation of moisture	
6-4	高温放置 High temp. Exposure	温度 /Temperature : $+70 \pm 2^{\circ}\text{C}$ 时间 /Time : 96h	在常温常湿下放置4h后，电机性能应符合以下要求。 1)额定转速:指标在初始值±30%以内。 2)额定电流:指标在初始值±30%以内。 3)起动电压:2.5V DC Max. After 4h exposure in the ordinary temperature and humidity, change rates of the motor's performance should accord with below requirements: 1)Rated speed: within $\pm 30\%$ of initial value. 2)Rated current: within $\pm 30\%$ of initial value. 3)Starting voltage: 2.5V DC Max
6-5	振动 Vibration	频率 /Frequency: 10~55Hz 加速度 /Acceleration: 22m/s ² 周期 /Period: 10 Minutes log sweep (1.0G), (10~55~10Hz) 条件 /Condition: This motion shall be applied for a period of 10 minutes in direction of X, Y, Z.	
6-6	自然跌落 Free fall	试验状态: 将马达固定在约100克(包括马达本身)的物体上，落向水泥地面。 Test state: Set the motor to a block of an approx. 100g weight (including the motor) and drop it onto the concrete floor. Height: 1.5m Direction : $\pm x, \pm y, \pm z$ Number of times: 3 times each direction Shock: 29420m/s^2 equivalent to 3000G.	

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B 料号				
			Document No 文件编号:FUGE-2037B Spec .Doc 规格书文档	Edition 版本: A	5/12		

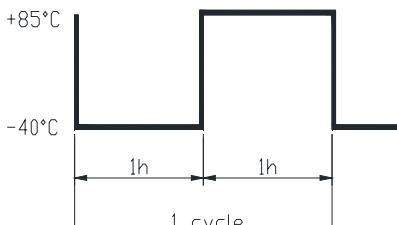
项目/Item		规格/Specification	判定基准 / Requirements
6-7	滚筒试验 Barrel roll test	<p>滚筒高度: 1.0M 滚筒次数: 300次. 滚筒速率: 13±1次/分钟</p> <p>Height: 1.0M Times: 300 times. Speed: 13±1 times/Minute</p>	<p>在常温常湿下放置4h后，电机性能应符合以下要求。</p> <p>1)额定转速:指标在初始值±30%以内。 2)额定电流:指标在初始值±30%以内。 3)起动电压:2.5V DC Max.</p> <p>After 4h exposure in the ordinary temperature and humidity, change rates of the motor's performance should accord with below requirements:</p> <p>1)Rated speed: within ±30% of initial value. 2)Rated current: within ±30% of initial value. 3)Starting voltage: 2.5V DC Max</p>
6-8	热冲击 Heat shock test	 <p>+85°C -40°C 1h 1h 1 cycle</p> <p>试验循环 /Test cycle :15 cycles</p>	<p>在常温常湿下放置4h后，电机性能应符合以下要求。</p> <p>1)额定转速:指标在初始值±30%以内。 2)额定电流:指标在初始值±30%以内。 3)起动电压:2.5V DC Max.</p> <p>After 4h exposure in the ordinary temperature and humidity, change rates of the motor's performance should accord with below requirements:</p> <p>1)Rated speed: within ±30% of initial value. 2)Rated current: within ±30% of initial value. 3)Starting voltage: 2.5V DC Max</p>

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B 料号			
 24.08.06	 24.08.06	 24.08.06	Document No 文件编号:FUGE-2037B Spec .Doc 规格书文档	Edition 版本: A	6/12	

7. 标准测量方法/ Standard Measuring Method

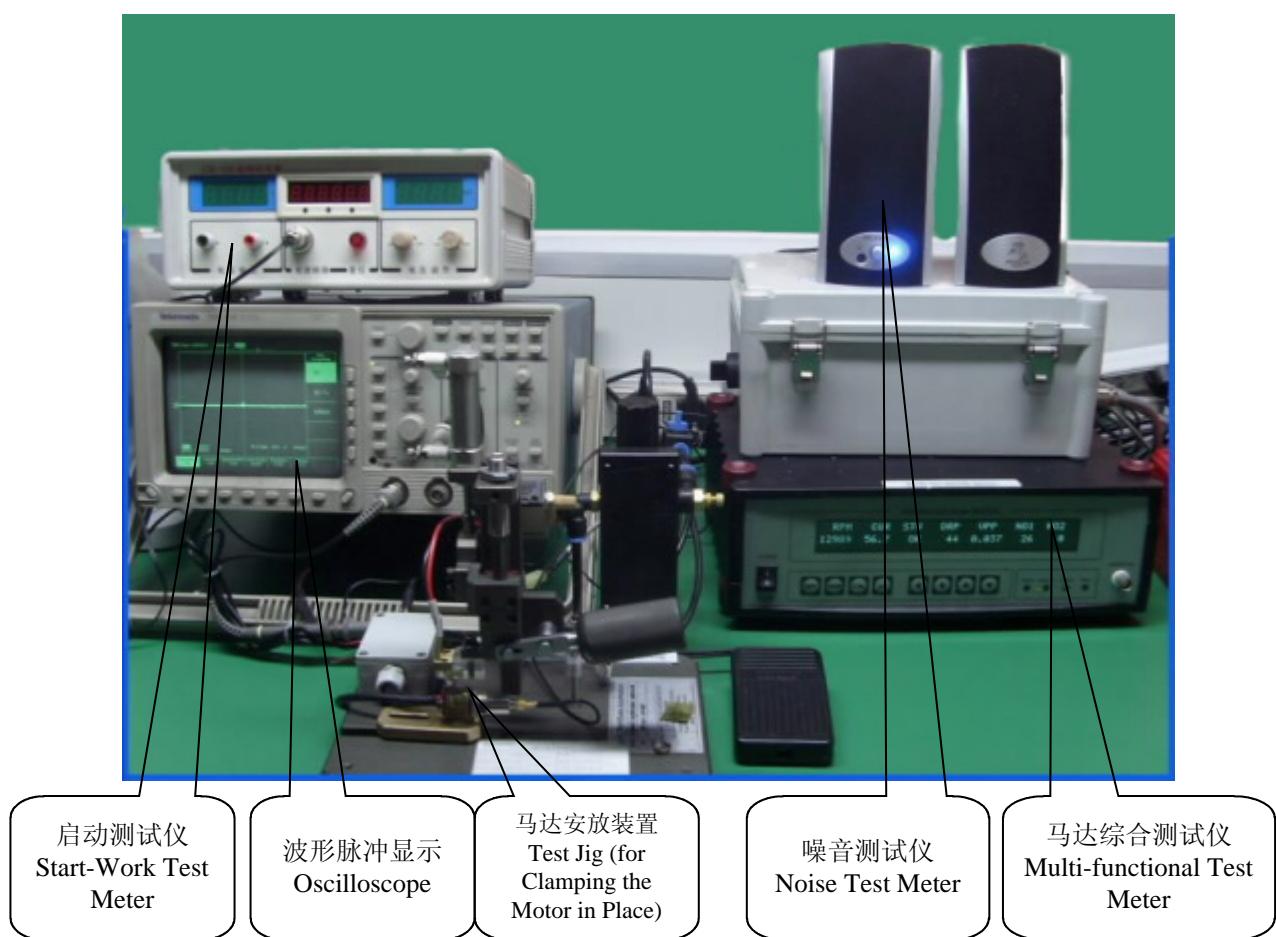

8. 测量方法及回路图/ Measuring Method & Circuit Map

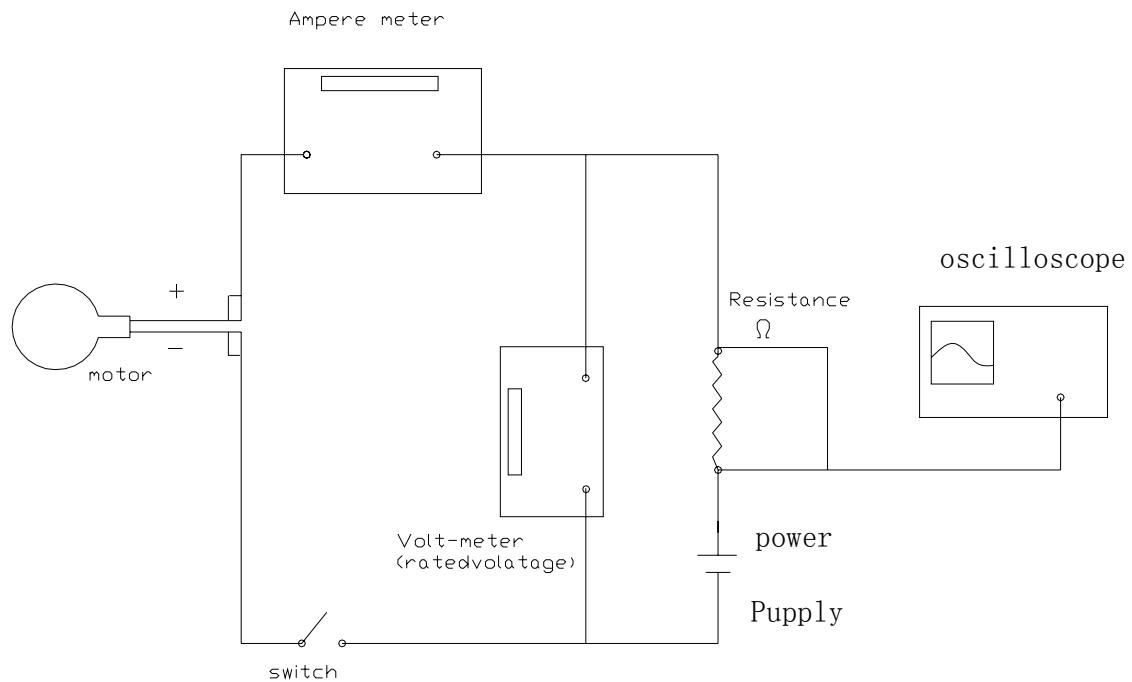

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B 料号				
FUGE 24.08.06 张勇	FUGE 24.08.06 陆圆林	FUGE 24.08.06 魏旭	Document No 文件编号: FUGE-2037B Spec .Doc 规格书文档	Edition 版本: A	7/12		

9. 使用时注意事项/ Caution in Use

9-1 必须按照规格书标准使用, 否则性能和寿命都将受到相当地减少, 必须注意电压的使用范围。 / The performance and lifetime would be considerably reduced if the operation is not done as per the specification defines. Do pay attention to the range of operating voltage in use.

9-2 建议马达在六个月内使用, 不要在以下环境中使用及保存:

- 高温和高湿的场所;
- 腐蚀性气体, 如: H₂S、SO₂、NO₂、Cl₂;
- 生锈场所。

It is suggested to use the motors within 6 months as possible as you can.

It is not suggested to use or store the motors under the following conditions:

- High temperature and high humidity area.
- Corrosive gas environment, such as H₂S, SO₂, NO₂, Cl₂ etc.
- Dusty areas.


9-3 注意处理马达的工作环境, 避免含铁质物体被马达吸住, 否则马达将会产生噪声, 性能会降低, 从而减少产品可靠性。 / Keep clean the working environments to avoid the objects such as iron powder etc are attracted by the magnet. Otherwise, it would cause noise, function deterioration and lower reliability.

9-4 应确信本产品不会与相关标准、法律、政令相背。 / Be sure not to disobey the local laws and rules.

9-5 拿马达时, 要轻拿轻放。 / The motors should be taken up and placed gently in operation.

9-6 钢板面或边缘有少许锈斑是允许的。 / Slight rust on the edge of the steel housing is permitted.

10. 特性曲线图/Characteristics Graph

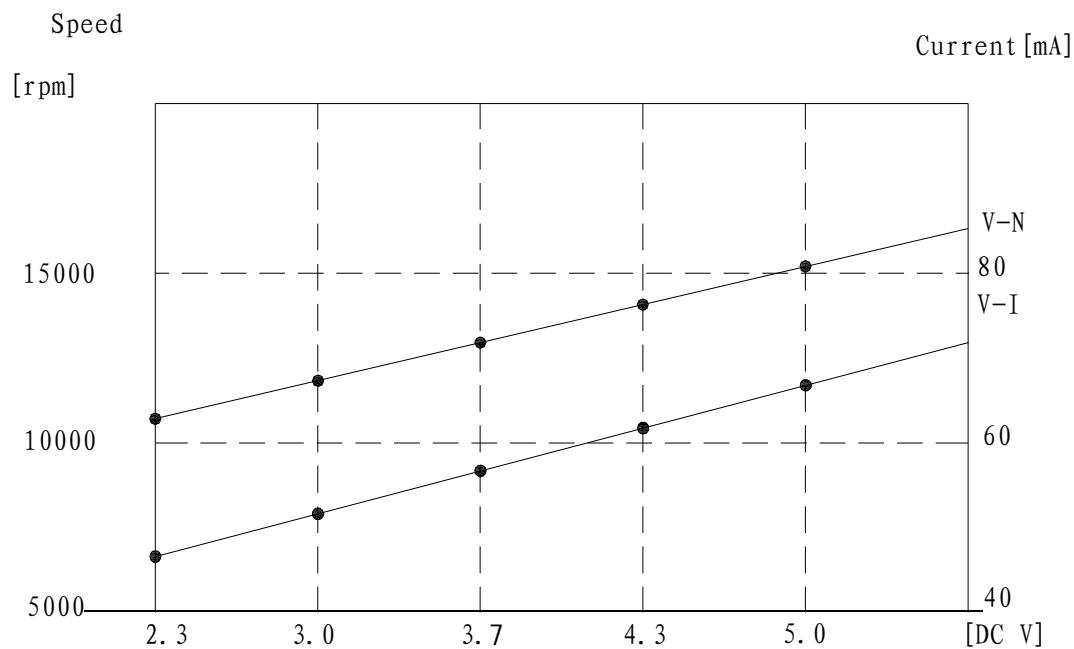

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B 料号				
 张勇 24.08.06	 胡国伟 24.08.06	 王旭 24.08.06	Document No 文件编号: FUGE-2037B	Edition 版本: Spec.Doc 规格书文档	A	8/12	

11. 环境管理物质/ Environmental Management Materials:

11.1 本产品应符合RoHS 指令要求和无卤素要求。

The product should be in compliance with RoHS/ REACH requirements:

* 镉及其化合物最大允许含量为100PPM

Cadmium and Compound: 100PPM

* 铅及其化合物最大允许含量为1000PPM

Lead and Compound: 1000PPM

* 汞及其化合物最大允许含量为1000PPM

Hydrargyrum and Compound: 1000PPM

* 六价铬及其化合物最大允许含量为1000PPM

+6 Chromium and Compound: 1000PPM

* 多溴联苯及其化合物最大允许含量为1000PPM

PBB and Compound: 1000PPM

* 多溴二苯醚及其化合物最大允许含量为1000PPM

PBDE and Compound: 1000PPM

* 氯溴两种卤素之和最大允许含量为1500PPM

The allowed content of Cl and Br is 1500PPM Max for total.

* 氯卤素最大允许含量为900PPM

The allowed content of Cl is 900PPM Max.

* 溴卤素最大允许含量为900PPM

The allowed content of Br is 900PPM Max.

11.2 本品所含有以下物质是RoHS指令豁免项

The below substance contained in the motor is exempted from RoHS directives:


序号 NO.	品名 Part Name	材质 Material	含有材质 Harzadaous Substance	允许容量 Limited Content	部品重量 Weight of Part
#1	含油轴承 Oiled Bearing	铜合金 Copper Alloy	铅 Pb	4%	0.03g

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B 料号		
FUGE 张勇 24.08.06	FUGE 葛国伟 24.08.06	FUGE 徐旭 24.08.06	Document No 文件编号:FGUE-2037B Spec.Doc 规格书文档		

12. 外形图/Outline Drawing

说明书/Specification 编号/NO. FUGE-2037B

代码/code: 0

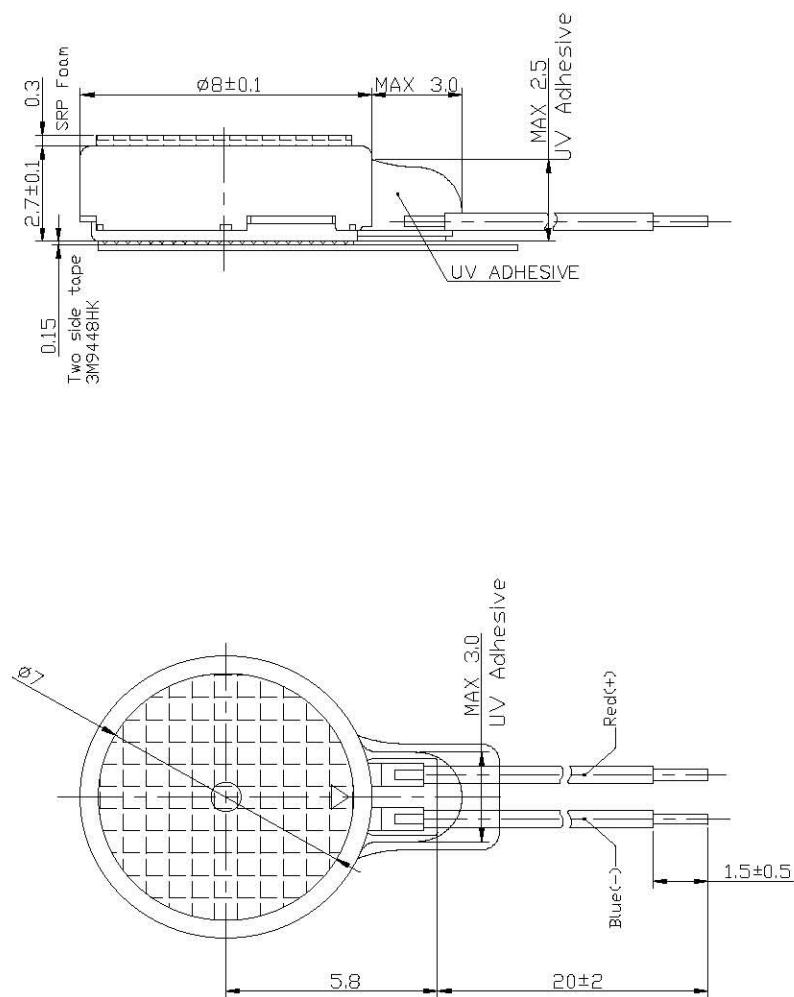

福歌标志	印字	A	B	C	D	E	F	G	H	I	J	K	L	M
马达	1034	1030	1027	1020	0833	0830	0825	0827	0820	0820	0820	0820	0825	
马达型号	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y
生产线	17	18	19	20	21	22	23	24	25	26	27	28	29	30

注: "T" 表示"生产1线 此类推"

日: [日期] 月: [月份] 年: [年份]

福歌标志	印字	A	B	C	D	E	F	G	H	I	J	K	L	M
马达	1	2	3	4	5	6	7	8	9	E	F	G	H	I
马达型号	H	1	2	3	4	5	6	7	8	9	10	11	12	13
生产线	印字	L	M	N	O	P	Q	R	S	T	U	V	W	X

技术要求 TECHNICAL NOTES:

- 额定电压 (Rated Voltage): 3.7V DC
- 额定电流 (Rated Current): 90mA Max
- 额定转速 (Rated Speed): 8000rpm Min
- 起动电压 (Starting Voltage): 2.5V
- 绝缘电阻 (Insulation Resistance): $\geq 10M\Omega$
- 导线规格 (Wires Spec): AWG32# UL3302

FG-B0827L2037B


外形图

标记处	数	分	区	更改文件号
设计	张	勇	2024.08.06	
校对	陈国栋	2024.08.06		阶段标记
审核	徐	旭	2024.08.06	比例

**FG 1
48 6**


日: [日期] 月: [月份] 年: [年份]
月: [月份] 月: [月份] 年: [年份]
年: [取末位数字(例如0表示2020年、以此类推)]

13. 包装/ Packaging:

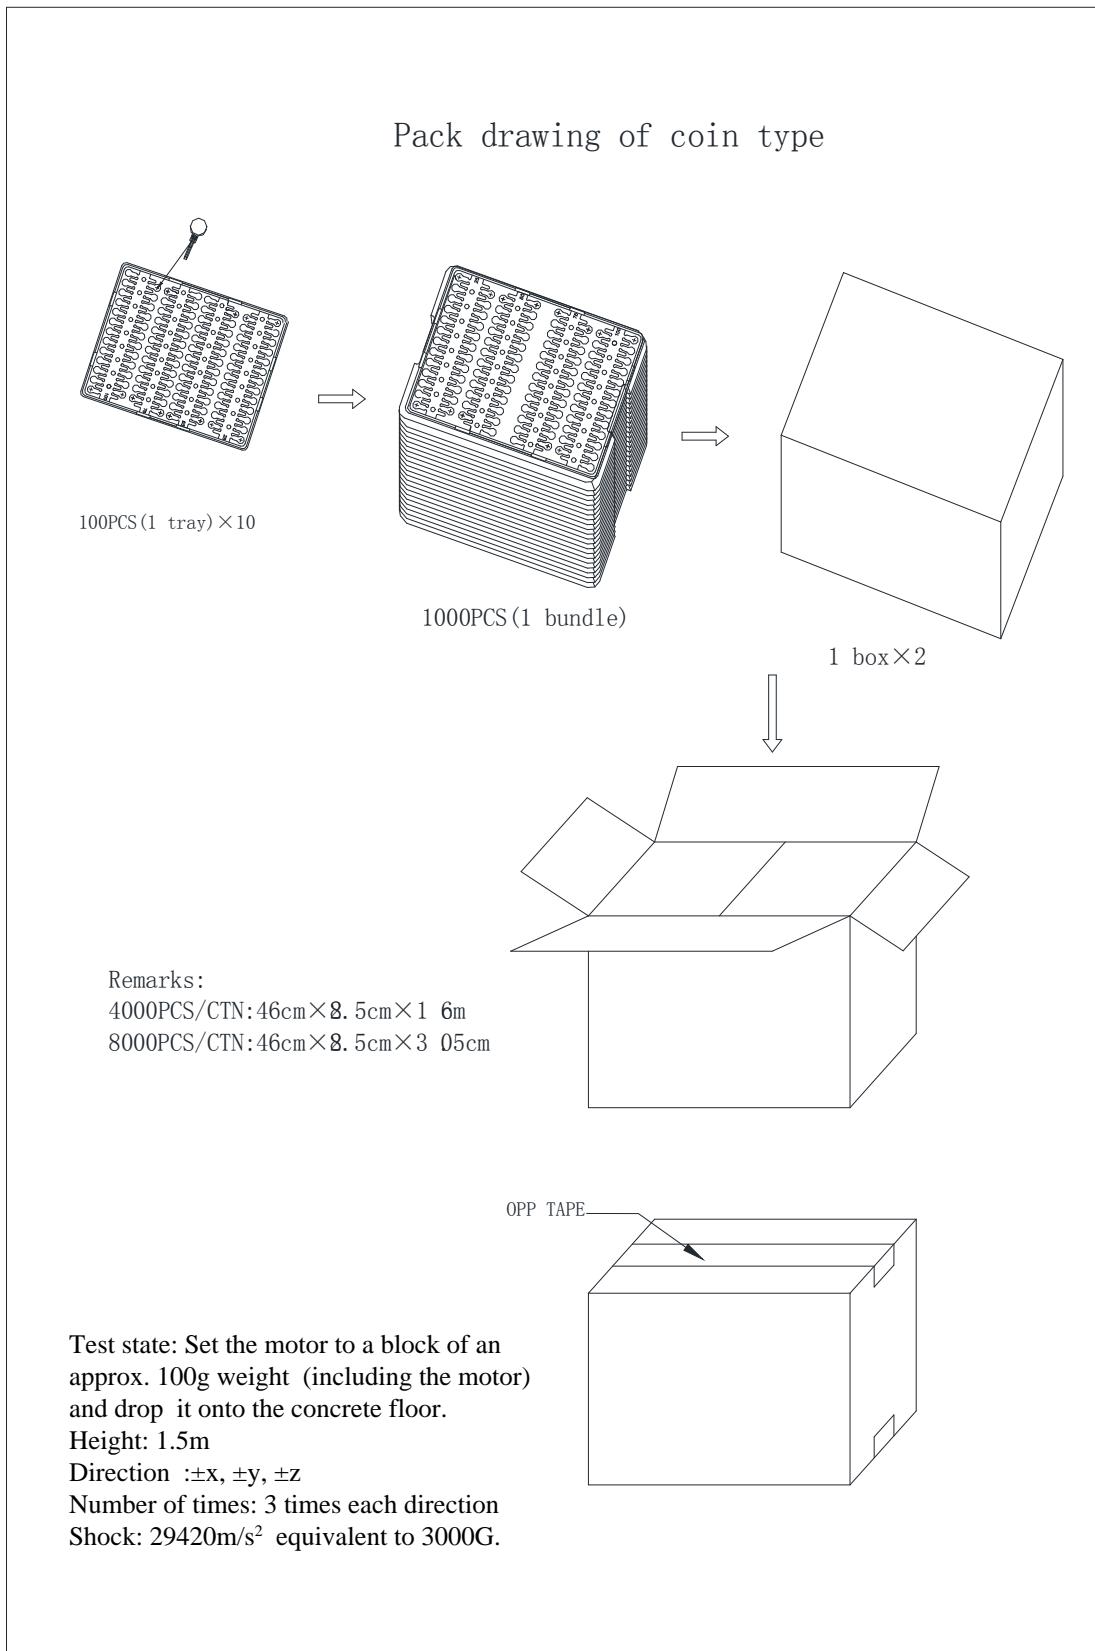

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B 料号				
24.08.06	24.08.06	24.08.06	Document No 文件编号: FUGE-2037B	Edition 版本:	A	11/12	
Spec .Doc 规格书文档							

14. 修改记录 / REVISION HISTORY

Dsgd 设计	Chkd 审核	Appd 批准	Part No: FG-B0827L2037B		
 张伟 24.08.06	 黄国杰 24.08.06	 韦博 24.08.06	料号		
Document No 文件编号:FUGE-2037B Spec.Doc 规格书文档	Edition 版本: A	12/12			